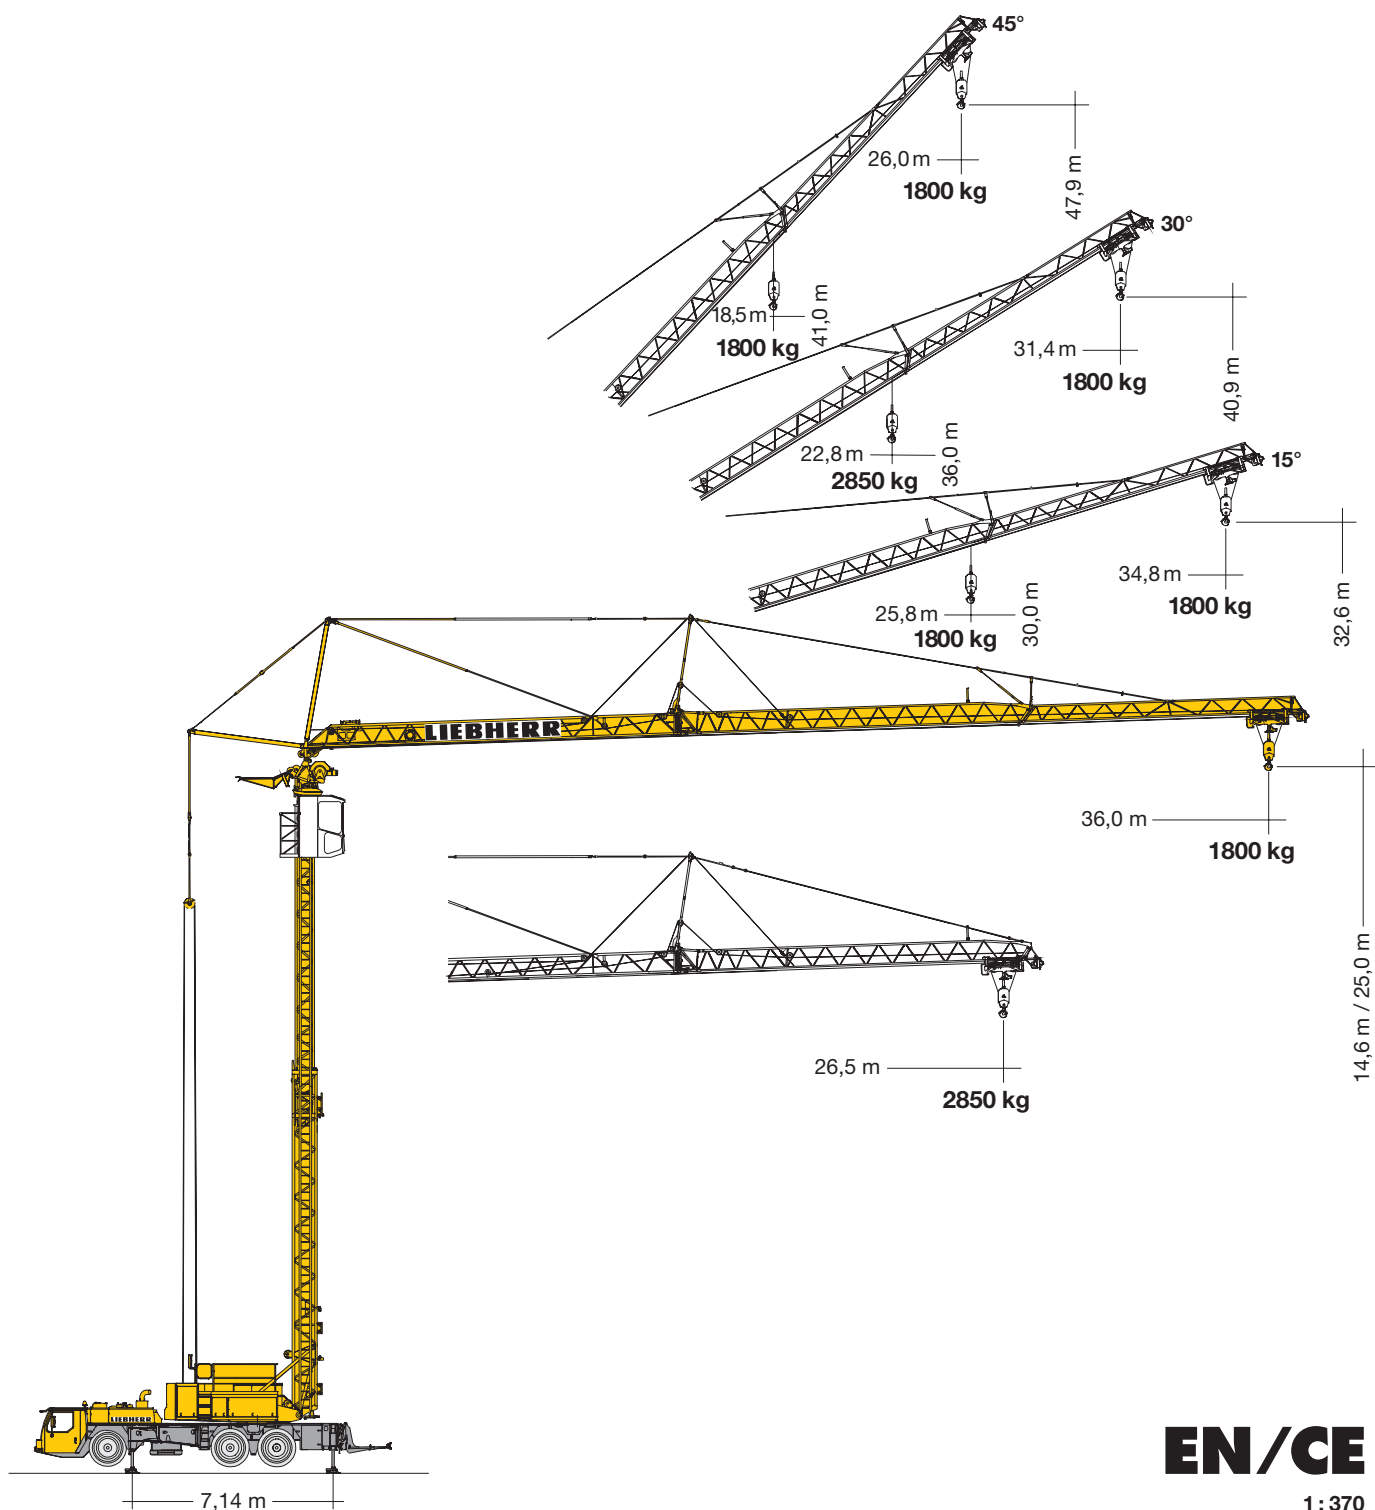


Mobilbaukran MK 63

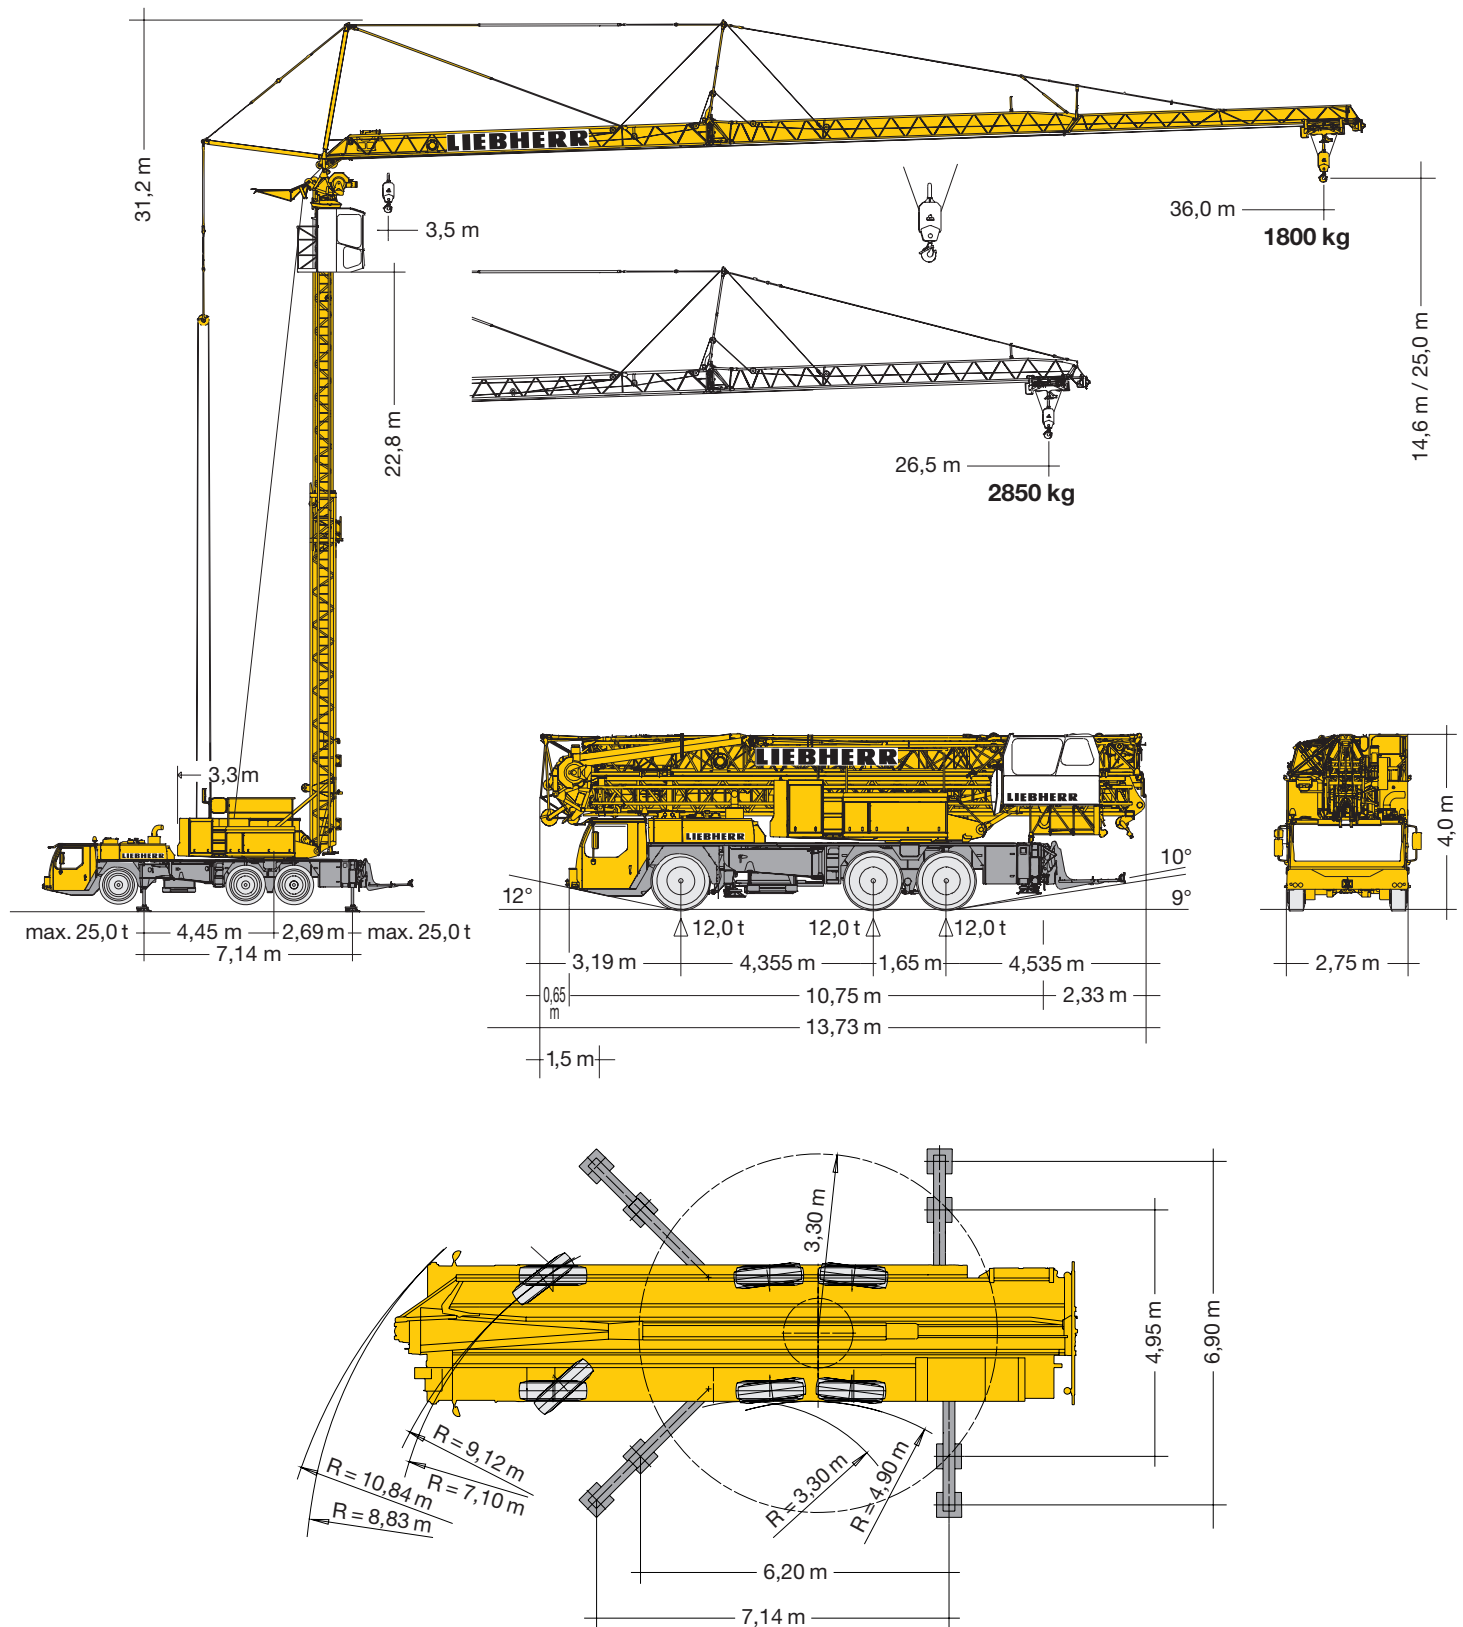
Mobile construction crane / Grue mobile de construction
Gru Edile / Grúa móvil de construcción / Mobiele torenkraan



EN/CE

1:370

LIEBHERR



Gewicht

Weight / Poids / Peso / Peso / Gewicht

zulässiges Gesamtgewicht

Permissible total weight / Poids total admissible
Peso totale ammissibile / Peso total admisible
Toegestaan totaalgewicht

36000 kg

Ausladung und Tragfähigkeit



Radius and capacity / Portée et charge / Sbraccio e portata / Alcances y cargas / Vlucht en draagkracht


 7,14 m x 6,90 m	m	 m / kg	Außer Betrieb keine Demontage notwendig. / Crane does not need to be disassembled when it is not in operation. / La grue n'a pas besoin d'être démontée lorsqu'elle est mise au repos. / Non è necessario lo smontaggio quando la gru è fuori servizio. / No es necesario desmontar la grúa en caso de no trabajar con ella. / Indien niet in gebruik, is geen demontage noodzakelijk.																
 max. 6,5 Bft (14 m/sec.)			m / kg	9,0	10,0	12,0	14,0	16,0	18,0	20,0	22,0	24,0	26,0	26,5	28,0	30,0	32,0	34,0	36,0
 36,0		3,5 – 9,0 8000		8000	7200	5980	5090	4430	3910	3490	3140	2860	2610	2560	2410	2220	2070	1930	1800
 26,5		3,5 – 10,0 8000		8000	8000	6610	5640	4910	4330	3870	3490	3180	2910	2850					




 7,14 m x 6,90 m	m	 m / kg	Außer Betrieb keine Demontage notwendig. / Crane does not need to be disassembled when it is not in operation. / La grue n'a pas besoin d'être démontée lorsqu'elle est mise au repos. / Non è necessario lo smontaggio quando la gru è fuori servizio. / No es necesario desmontar la grúa en caso de no trabajar con ella. / Indien niet in gebruik, is geen demontage noodzakelijk.																
 max. 8,0 Bft (20 m/sec.)			m / kg	9,0	10,0	12,0	14,0	16,0	18,0	20,0	22,0	24,0	26,0	26,5	28,0	30,0	32,0	34,0	36,0
 36,0		3,5 – 8,3 8000		7360	6590	5450	4630	4010	3530	3140	2830	2570	2340	2290	2150	1990	1840	1710	1600
 26,5		3,5 – 9,4 8000		8000	7540	6230	5300	4600	4050	3620	3260	2960	2710	2650					

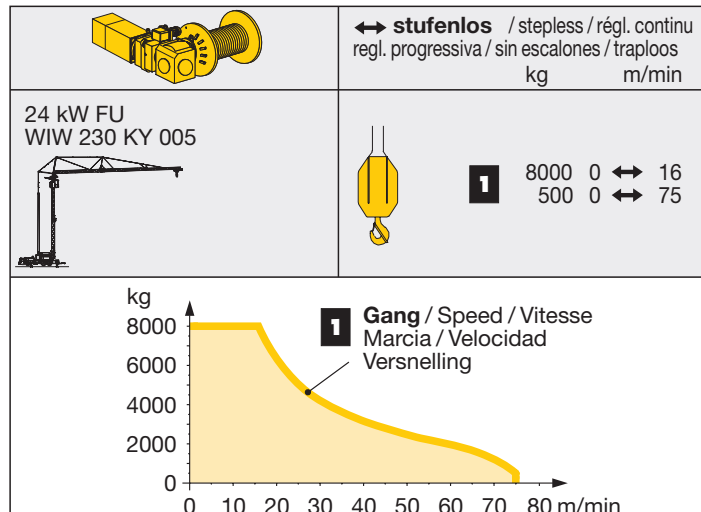
Auslegersteilstellung


Steep angle positions / Flèche en position relevée
Braccio inclinato / Pluma inclinada / Hoofdgiekstand

 7,14 m x 6,90 m	m	 m / kg	m / kg 30°																
 max. 6,5 Bft (14 m/sec.)			7,0	8,0	9,0	10,0	12,0	14,0	16,0	18,0	20,0	22,0	23,2	24,0	26,0	28,0	30,0	31,4	
 36,0		3,5 – 8,0 6000	6000	6000	5490	5070	4400	3870	3450	3100	2820	2570	2450	2370	2190	2030	1890	1800	
 26,5		3,5 – 9,5 6000	6000	6000	6000	5750	5020	4440	3970	3590	3270	2990	2850						

 7,14 m x 6,90 m	m	15°							45°						
 max. 6,5 Bft (14 m/sec.)		kg							kg						
 36,0		3,5 – 34,8							3,5 – 26,0						
 26,5		3,5 – 25,8							3,5 – 18,5						

	0 ↔ 1,1 U/min	5,0 kW FU
	0 ↔ 70,0 m/min	4,0 kW FU
	0 – 15° 0 – 30° 0 – 45°	40 sec. 80 sec. 100 sec.



		1	2	3	4	5	6	7	8	9	10	11	12	R1	R2	
	(km/h)	6,7	8,3	10,8	13,2	16,7	20,5	28,2	34,7	45,0	55,4	69,8	75,0	6,6	8,1	38,5%
	(km/h)	3,9	4,8	6,2	7,7	9,7	11,9	16,3	20,1	26,1	32,1	40,5	49,8	3,8	4,7	> 55,3%

	14.00 R 25	BGL		C.0.08.0063
--	------------	------------	--	-------------

400 V	Hz	kVA
111,0 m 5 x 16 mm ²	50	37,0

Aufstellvorgang

Erection procedure / Déroulement de montage
Procedimento di montaggio / Procedimiento de montaje / Opstelling van de mobiele torenkraan

